



STREAMLINING EMI PROTECTION IN HIGH-DENSITY NETWORK EQUIPMENT

Molex Optical EMI Shielding Adapters ease space constraints and simplify mechanical design related to EMI shielding in network equipment including racks, servers, routers, switches and optical junction boxes.

INDUSTRY FOCUS

Within all electrical systems, electromagnetic interference (EMI) is created by electromagnetic waves. However, EMI can also interfere with the proper operation of other electronic devices in close proximity. EMI and, more specifically, electromagnetic compatibility (EMC) are often design issues for Molex customers' manufacturing equipment and systems which incorporate fiber optic interconnects. EMC defines the ability of electronic devices to function as designed in a potentially hostile EMI environment, as well as not generating EMI that could interfere with other devices.


High-performance network equipment found in modern network architecture is packed with integrated circuits and complex printed circuit boards (PCBs) emitting electromagnetic waves. While fiber optics represents a major step forward in high-speed, high-reliability digital transmission over a range of distances in demanding network applications, the connection points between fiber optics and equipment are not immune to EMI problems. Excessive and unabated EMI leakage around connections and cable assemblies may result in a host of potential issues from unexplained data errors to lost data to signal integrity problems.

BUSINESS CHALLENGE

Traditional insulative plastic adapters offer no EMI shielding of the panel cutout, acting as a window for EMI energy to exit or enter the equipment. The existing industry standards for the design of fiber optic connectors and adapters do not require the inclusion of EMI shielding. As a result, the vast majority of fiber optic connections are constructed of non-metallic, insulated polymers, which can be problematic in achieving EMI compliance.

A variety of barrier type methods are available to reduce unintentional radiated noise, including adding extra metal shields to improve the Faraday cage performance of the device enclosure, improving the PCB layout and strategically adding filtering devices such as chokes, ferrites, resistors and capacitors. While these approaches are not without merit, they all drive up the cost, the number of needed components and the equipment footprint in space-constrained applications.

EMI problems often do not show up until late in the system verification process, making issues more difficult to identify and costly to correct. Simulation and analysis of EMI during the product design phase are critical to mitigate those challenges. Yet, few suppliers fully understand or test connector and cabling components to determine how well a device under test performs to prevent EMI and shield against the effects of external disturbances.

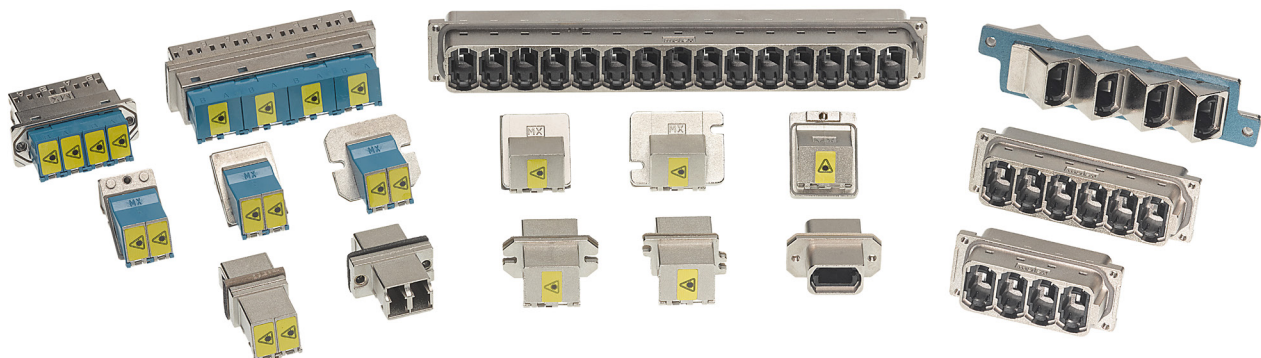



SOLUTION

Addressing the myriad of mechanical design challenges that customers must overcome, Molex Optical EMI Shielding Adapters are ideal for data and telecommunications network equipment applications that require I/O density, EMI containment, streamlined behind-panel fiber routing and eye protection.

The innovative adapters are designed to effectively shrink the size of the port or aperture on the panel or enclosure. The die-cast or conductive polymer body with a gasket minimizes EMI leakage by filling gaps between mounting surfaces and providing a conductive ground path between the adapter and enclosure of the equipment. By creating a smaller opening and blocking or absorbing EMI signals before they escape, the adapter allows shielding to occur at the point of connection. Depending on the application, the use of an adapter may entirely eliminate the need for a more costly and space monopolizing cage.

An extensive portfolio of Molex EMI Shielding Adapters meets industry standard interfaces for LC, SC, MTP/MPO and MXC. The multi-fiber MPO (MTP*) front-interface to MPO (MTP*) or MT or HBMT board-side interconnects offer optical routings that are closer to the panel and protrude less inside the box, optimizing internal space. The industry-standard LC and MPO interfaces, available in multi-port options, ease space constraints on the panel and increase port density in a smaller package design. Mounting options include easy snap or screw mounting for a more rugged fastener. A Molex patented laser protection shutter provides reliable eye safety, and provides dust protection and reduces EMI even when no connector is installed.

To assure the efficacy of these products, Molex performs extensive EMI shielding effectiveness testing of its various EMI adapters up to 40 GHz.

Key Features of Molex Optical EMI Shielding Adapters

- Industry-standard interfaces
- Metal die-cast and/or conductive polymer housings—Provide superior EMI protection
- Internal safety shutter—Reliable eye safety, with easy insertion and removal of the connector and reduced EMI when no connector is installed
- EMI gaskets—Create a reliable seal between the adapter and mounting surface
- Screw or snap-mount styles—Provide mounting flexibility
- Front or back surface mounting
- Ceramic or phosphor bronze alignment sleeves—Single-or-multimode performance
- High-density solutions—Ease space constraints on the panel and increase available ports
- Straight or 45° adapter mounting orientation—Allows for a lower cable exit profile
- The half plastic/half metal adapter design greatly improves mating durability compared to full metal or plated plastic (patented Molex solution)

KEY BENEFITS

Mechanical design requirements are constantly demanding increased density and EMI shielding. Molex is committed to understanding how to effectively manage EMI in data centers and other high performing network environments. Building on decades of innovation and expertise in data and telecommunications, Molex develops disruptive technologies and leads the industry in connectivity standards.

A proven portfolio of Molex solutions and approaches for controlling EMI are designed to harden network electronic connections and equipment to combat the effects of EMI. High-Density Optical EMI Shielding Adapters deliver improved EMI shielding compared with traditional insulative plastic adapters, as validated through an extensive Molex testing regimen. SC, LC, MPO and other industry-standard adapter configurations come in a broad range of mounting options, enabling optimal design flexibility and compatibility with legacy and new equipment designs.

To learn more www.molex.com/product/emiadapters.html

Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.