

Multi-Trak I/O Connectors >

Multi-Trak I/O connectors offer a slim form factor with a 0.60mm pitch for excellent space savings. These connectors transmit reliable signal and power that provides design flexibility and meets the requirements for PCIe Gen 6 data transmission rates.

ADVANTAGES AND FEATURES

Provides flexibility for designs

The small form-factor of Multi-Trak I/O Connectors provides a wide variety of options for various configurations.


Meets versatility needs for different applications

Multi-Trak I/O Connectors support both high-speed and power transmission that are widely accepted in data systems, communications and compute environments.

Offers a robust mechanical connector

Multi-Trak I/O Connectors have an anti-slant, anti-reverse design with contact protection to simplify assembly and prevent damage to the pins.

Voltage	30V DC
Current	10.5A max. per power pin, 0.5A max. per signal pin
Pitch	0.60mm
Operating Temperatures	-20 to +80°C

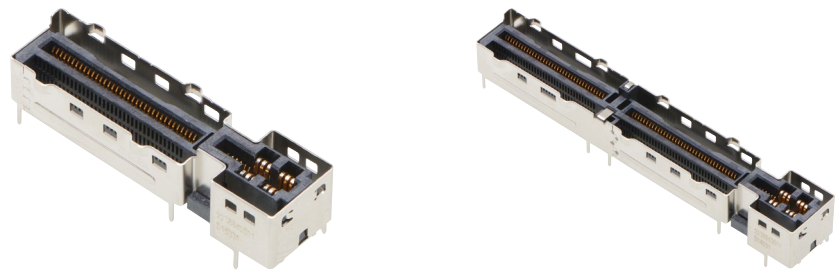


MARKETS AND APPLICATIONS

Server and Storage


Storage racks
Storage controllers
Redundant array of independent disks storage (RAIDS)
Enterprise storage systems
AI servers and High-Performance Computing

Telecommunications

Routers
Switches
Servers
Edge computing systems



Storage Racks



Servers

Multi-Trak I/O Connectors >

SPECIFICATIONS

Reference Information

Packaging: Tape and reel
Designed in: Millimeters
RoHS: Yes
Halogen Free: Yes

Mechanical

Mechanical
Latched Mating Force (max.): 1.10N
Latched Unmating Force (min.): 0.10N
Durability (max.): 500 ± 50 cycles
Latch Retention (min.): 50N
Mechanical Shock (max.): 20 milliohms
Contact Normal Force (min.): 0.09N

Electrical

Voltage (max.): 30V DC
Current (max.): 21.0A
Standard Version: 10.5A per power pin,
0.5A per signal pin
Low-Level Contact Resistance (max.):
20 milliohms
Dielectric Withstanding
Voltage: 300V DC
Insulation Resistance (min.): 1,000 Megohms

Physical

Housing: LCP
Contact: Copper Alloy
Shell: Stainless Steel
Operating Temperatures: -20 to +80°C